




2 Door Telescopic Sliding Door Track Kit - Max Door Width Per Panel 1200mm - To Cover A Maximum Opening Of 2330mm - Max Panel Weight 80kg

Product Images

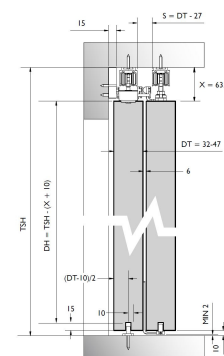

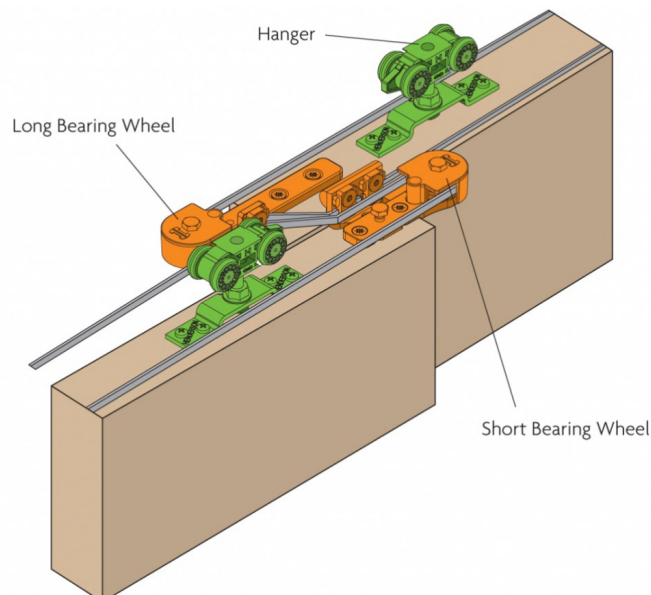

Description

- **Non stock product - sent direct from factory - please allow 3-4 weeks for delivery**
- 2 Door telescopic sliding door track kit to cover a maximum opening width of 2330mm
- Ideal system for where sliding doors are required to cover a large opening width.
- Doors stack to one side of the opening for extra space saving. Ideal for situations where there is not enough wall space for one large door.
- Allows multiple doors to travel simultaneously
- The two door leaves are linked together via a toothed belt and pulley system.
- No guide channel required, allowing for a seamless walkway between rooms.
- Ideal for sliding partitions as doors can be neatly stacked to one side of the opening.
- Includes all the components needed to install a long lasting, smooth running soffit (ceiling) mounted 2 door telescopic sliding door system.
- Supplied with anodised aluminium pre-drilled track for a durable, long lasting finish and easy installation.
- Suitable for use with timber doors.
- **Doors not included.**

Door Specifications


- Maximum door leaf weight 80kg (per door panel),
- Minimum door width 500mm (per door panel).
- Maximum door width 1200mm (per door panel).
- Door thickness 32mm - 47mm.

Track Lengths & Dimensions

- 1 x 2500mm length track for the 1st door panel (follower door).
- 1 x 4000mm length track for the 2nd door panel (lead door).

- Please note the aluminium tracks can be cut to length on site using a standard hacksaw.

2 Door System

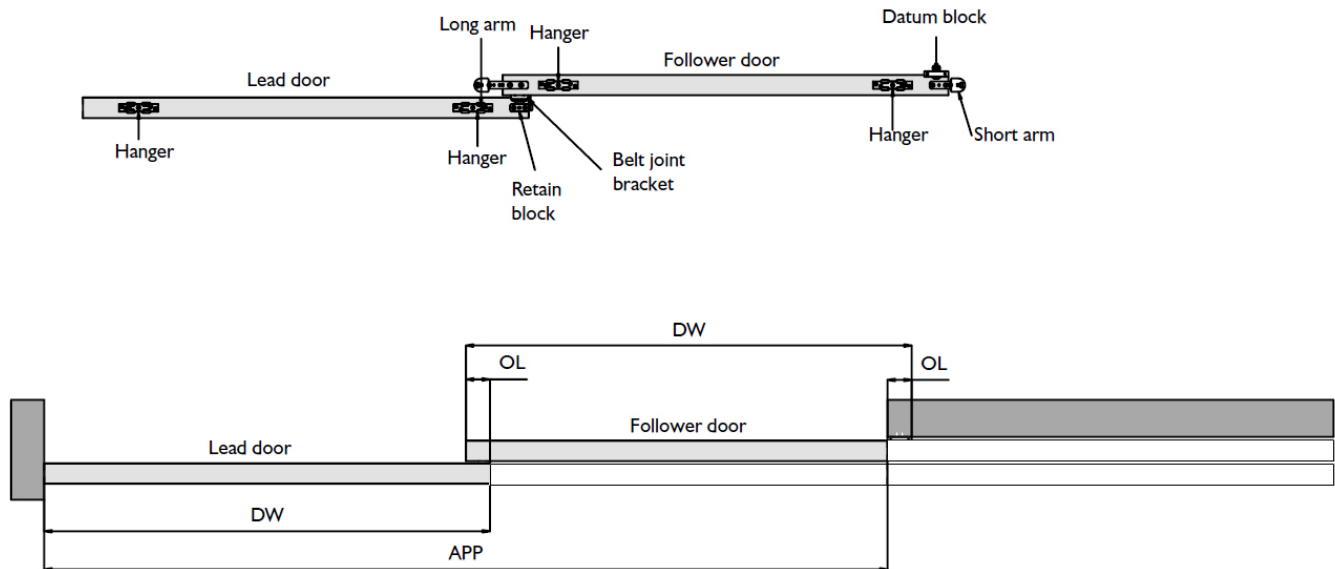


$$APP = (2 \times DW) - (2 \times OL)$$

$$OL = 70\text{mm (RECOMMENDATION)}$$

$$APP = 2 \times DW - 140$$

Ceiling Mounted

- Ceiling mounted tracks.
- Please note a return wall section is required to install the belt fixing unit.

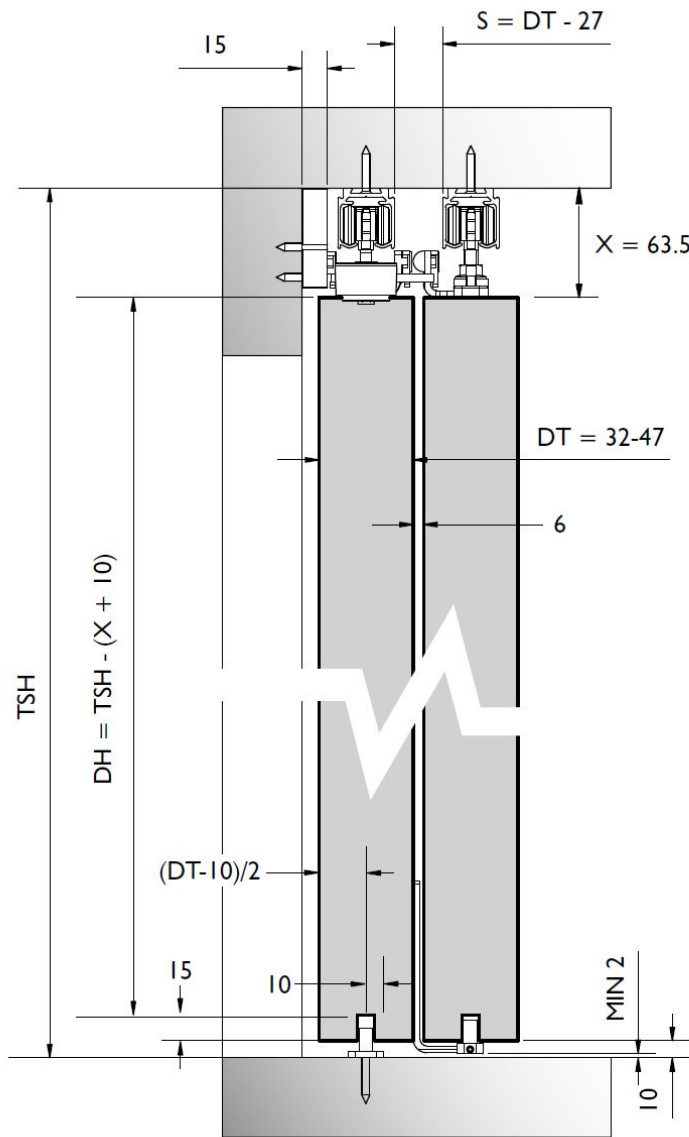


Alternative Kits

- 3 door telescopic kit to cover a maximum opening width of 3460mm - **see related product 43514.1.**
- 4 door double telescopic kit (2 x pairs of doors sliding in each direction) to cover a maximum opening width of 4660mm - **see related product 43515.1.**

Floor Guides

- No floor channel required, allowing for a seamless walkway between rooms. Meaning that there are no dust traps and therefore easier to install across a variety of applications
- "T" shape floor guide is used for the 1st door panel which is fixed to the floor next to the door frame.

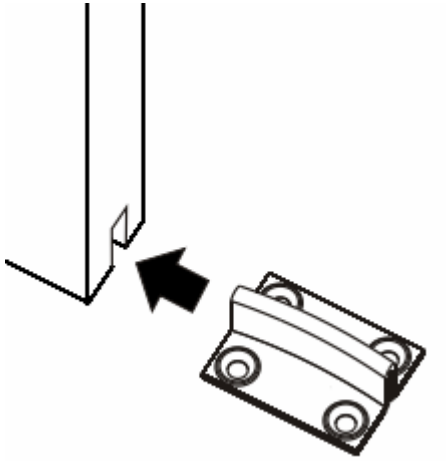

- "L" shape door guide is installed at the bottom (near the leading edge) of the 1st door panel and guides the 2nd door panel.



Items Included Within The 2 Door Telescopic Sliding Door Kit

- 4 x Hangers & apron plates
- 1 x Short bearing wheel assembly
- 1 x Door mounted belt fixing bracket
- 1 x Length of toothed belt
- 1 x Following door guide
- 1 x Fixed base floor guide
- 1 x Long bearing wheel assembly
- 1 x Wall mounted belt fixing
- 1 x 2500mm length anodised aluminium track
- 1 x 4000mm length anodised aluminium track

Product Video

Products in this set



43513.1 - 2 Door Telescopic Sliding Door Track Kit - Max Door Width Per Panel 1200mm - To Cover A
Maximum Opening Of 2330mm - Max Panel Weight 80kg (Per Panel)