



G Johns & Sons Ltd Unit D Westside Business Centre Flex Meadow Harlow, Essex CM19 5SR www.gjohns.co.uk 020 8360 7771 sales@gjohns.co.uk VAT No: GB232661872 Company No: 00384076

3 Door Telescopic Sliding Door Track Kit - Max Door Width Per Panel 1200mm - To Cover A Maximum Opening Of 3460mm - Max Panel Weight 80kg


Product Images









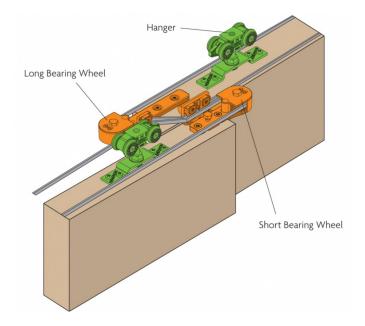

Description

- Non stock product sent direct from factory please allow 3-4 weeks for delivery
- 3 Door telescopic sliding door track kit to cover a maximum opening width of 3460mm
- Ideal system for where sliding doors are required to cover a large opening width.
- Doors stack to one side of the opening for extra space saving. Ideal for situations where there is not enough wall space for one large door.
- This 3-door sliding track system Allows 3 x doors to travel simultaneously
- The three door leaves are linked together via a toothed belt and pulley system.
- No guide channel required, allowing for a seamless walkway between rooms.
- Ideal for sliding partitions as doors can be neatly stacked to one side of the opening.
- This 3-track sliding door system includes all the components needed to install a long lasting, smooth running soffit (ceiling) mounted 3 door telescopic sliding door system.
- Supplied with anodised aluminium pre-drilled track for a durable, long lasting finish and easy installation.
- Suitable for use with timber doors.
- Doors not included.


Door Specifications


- Maximum door leaf weight 80kg (per door panel),
- Minimum door width 500mm (per door panel).
- Maximum door width 1200mm (per door panel).
- Door thickness 32mm 47mm.

Track Lengths & Dimensions

- 1 x 2500mm length track for the 1st door panel (follower door).
- 1 x 4000mm length track for the 2nd door panel (follower door).


- 1 x 6000mm length track for the 3rd door panel (lead door).
- Please note the aluminium tracks can be cut to length on site using a standard hacksaw.

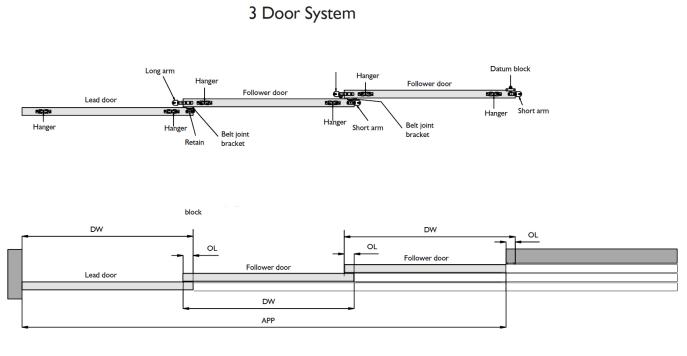



Ceiling Mounted

- Ceiling mounted tracks.
- Please note a return wall section is required to install the belt fixing unit.

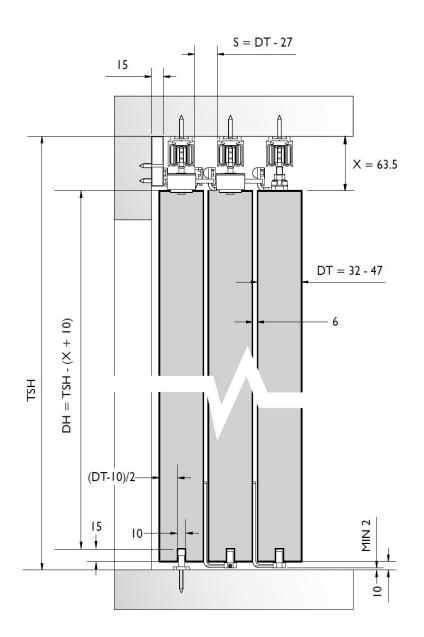


Alternative Kits

As well as the 3-door telescopic kit system, there are also the following available:

- 2 door telescopic kit to cover a maximum opening width of 2330mm see related product 43513.1.
- 4 door double telescopic kit (2 x pairs of doors sliding in each direction) to cover a maximum opening width of 4660mm **see** related product 43515.1.

Floor Guides

- No floor channel required, allowing for a seamless walkway between rooms. Meaning that there are no dust traps and therefore easier to install across a variety of applications
- "T" shape floor guide is used for the 1st door panel which is fixed to the floor next to the door frame.



• "L" shape door guide is installed at the bottom (near the leading edge) of the 1st door panel and guides the 2nd door panel.



Items Included Within The 3-Door Telescopic Sliding Door Kit

- 6 x Hangers & apron plates
- 2 x Short bearing wheel assembly
- 2 x Door mounted belt fixing bracket
- 1 x Length of toothed belt
- 2 x Following door guide
- 1 x Fixed base floor guide
- 2 x Long bearing wheel assembly
- 1 x Wall mounted belt fixing
- 1 x 2500mm length anodised aluminium track
- 1 x 4000mm length anodised aluminium track
- 1 x 6000mm length anodised aluminium track

Product Video

43514.1 - 3 Door Telescopic Sliding Door Track Kit - Max Door Width Per Panel 1200mm - To Cover A Maximum Opening Of 3460mm - Max Panel Weight 80kg (Per Panel)

Products in this set

×