
G Johns & Sons Ltd Unit D Westside Business Centre Flex Meadow Harlow, Essex CM19 5SR www.gjohns.co.uk 020 8360 7771 sales@gjohns.co.uk VAT No: GB232661872 Company No: 00384076


Overlay Hinge With Soft Close For Up To 36mm Thick Doors (And Up To 19mm Overlay) + 0mm Mounting Plate


Product Images














All adjustment options can be made independently of one another

- High quality concealed blum style full overlay hinges, with built in soft close mechanism and 3 way adjustable clip on mounting plate.
- For use with doors that overlay the carcass only. (Overlay doors sit on top of cupboard door frame.
- High architectural quality "clip on" design with built in soft closing device. No more slamming cupboard doors, just a gentle push and the cabinet
 door will self close coming to a controlled soft stop.
- 3 way adjust-ability the door can be adjusted vertically (moving the door up and down) horizontally (moving the door side to side) in and out (moving the door from or towards the carcass)
- Sprung hinge keeps door held closed no need for any kind of cupboard catch.
- Standard 35mm diameter cup with a 95 degree opening angle
- Comes supplied adjustable clip on mounting plate.

Suitable For Use On Overlay Style Doors Only

- Overlay cabinet hinges suitable for doors that sit on top of the cabinet carcass.
- Below diagram shows how an overlay hinge is fitted. (Notice how the door sits in front of the cupboard frame.)


FULL OVERLAY DOOR




Clip On Design

- This overlay hinge comes supplied with an adjustable clip on mounting plate, which allows the door to be fully adjusted and then quickly removed by simply pushing a small button at the very tip of the hinge.
- Below diagram shows how the concealed blum style hinge clips on and off from the mounting plate.


Clip On Hinge Instructions




Clamp hinge on to the mounting plate as shown by direction arrow



Press down the hinge arm to lock the plate as shown



The door can be quickly removed by pushing the button



Unclipping the door from the mounting plate leaves all adjustments unaltered

Base Material


• Made from steel.

Finish Details

• Bright zinc plated.


3 Way Adjustable Hinge

- This overlay hinge can be adjusted in 3 directions. (see below diagram.)
- Lateral adjustment turning the screw nearest to cup allows the door to move side to side with a total movement of 5mm possible.
- Front to back adjustment turning the screw at the tip of the hinge adjusts the door away from or toward the carcass with a total movement of 3.5mm possible.
- Vertical adjustment turning the cam operated screw on the mounting plate adjusts the height the of the door up and down with a total movement of 4mm possible.




Lateral Adjustment Moving Door Left – Right

Total Movement Of 5mm Possible



Front To Back Adjustment Spacing Door Off Carcass


Total Movement Of 3.5mm Possible



Vertical Adjustment Moving Door Up & Down


Total Movement Of 4mm Possible

Size Details

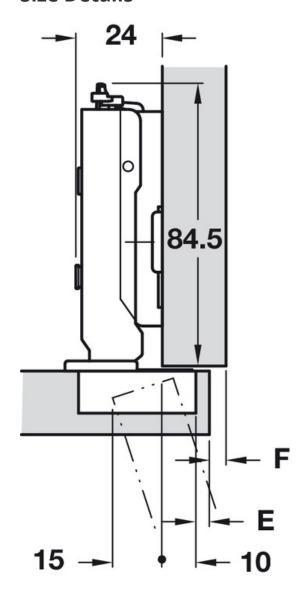


Door thickness mm	Distance to cup E mm				
	3.0	4.0	5.0	6.0	7.0
16	0.2	0.2	0.2	0.2	0.2
18	0.2	0.2	0.2	0.2	0.2
20	0.3	0.3	0.3	0.3	0.3
22	0.5	0.5	0.5	0.5	0.5
24	0.6	0.6	0.6	0.6	0.6
26	1.0	1.0	1.0	1.0	1.0
28	2.0	1.5	1.5	1.3	1.3
30	4.0	3.0	2.5	1.9	2.4
36	10.5	10.0	8.6	7.6	6.7
	Minimum gap F				


Drilling pattern for cup fixing




Drilling pattern for screw fixing





Dowel fixing





Impresso tool free fixing also suits above



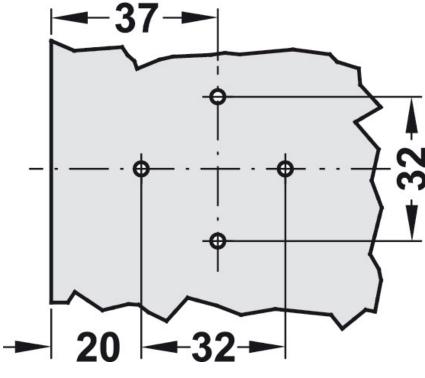







Depth adjustment +3/-2 mm

All adjustment options can be made independently of one another

- Standard 35mm diameter cup. (Hole diameter required to be drilled into the door.)
- 95 Degree opening angle.

Unit Of Sale

- The overlay cabinet hinge is sold individually. (Each)
- Comes supplied with adjustable clip on mounting plate and screws to suit 18mm thick door and carcass.

Products in this set



44325.1 - Overlay Hinge With Soft Close For Up To 36mm Thick Doors (And Up To 19mm Overlay) + 0mm Mounting Plate - (1 Hinge)