

G Johns & Sons Ltd Unit D Westside Business Centre Flex Meadow Harlow, Essex CM19 5SR www.gjohns.co.uk 020 8360 7771 sales@gjohns.co.uk VAT No: GB232661872 Company No: 00384076

# Surface Mounted Double Action Floor Spring Patch Door Closer For Glass Doors - Adjustable Power Size 3-5 - Max Door Width 1250mm - Max Door Weight 100kg - Satin Stainless Steel

## **Product Images**



## Description

- Frame-less glass patch, floor spring door closer kit.
- Surface mounted (no need to rebate into the floor).
- Door closer built into the bottom patch fitting.
- Adjustable power size 3-5.
- Complete kit, supplied with bottom patch closer, top patch, bottom pivot and top pivot.
- High efficiency cam and ease of opening.


- Glass patch door closers have been used in many varied applications globally, ideal for situations like concrete floors where it's difficult to use the traditional floor spring closer due to underfloor heating, cavity or mechanical services etc.
- The bottom plate is surface fixed and supplied with all necessary fixings.
- Supplied with satin stainless steel cover plates that have spring loaded pegs for speed of fitting. This fitting method is also very useful for maintenance or adjustments which can be made after the door set is completely fitted and swinging.
- Suitable for glass doors between 8mm to 12mm thick (supplied with the necessary fitting packs, spacers and supports).
- Suitable for use with tempered, laminated or double glazed glass.
- Max door width 1250mm.
- Max door weight 100kg.


#### Finish:

• Satin stainless steel.

#### **Dimensions:**

- Top patch 163mm x 30mm x 50mm
- Bottom patch 186.5mm x 40mm x 71mm
- To suit glass 8mm 12mm thick

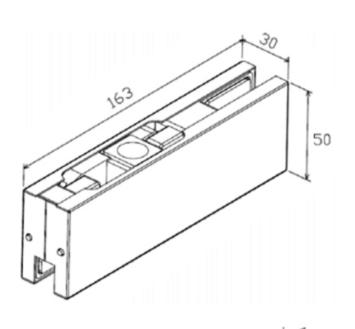

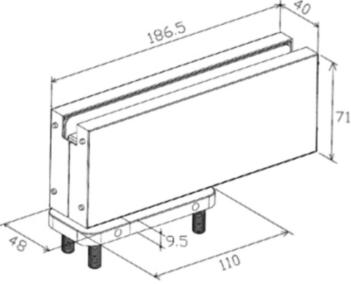

### **Ordering Options:**


- Standard kit (non hold-open).
- Hold open kit (mechanical hold open at 90 degrees).

### Features:


- Adjustable EN power size 3-5 via valve.
- Adjustable closing speed.
- Adjustable latch action.

### **Glass Cut-Out Requirements:**

• Top patch cut-out required in glass door (see below diagram).

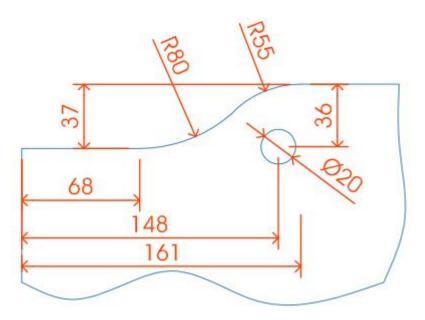

• Bottom patch / closer cut-out required in glass door (see below diagram):

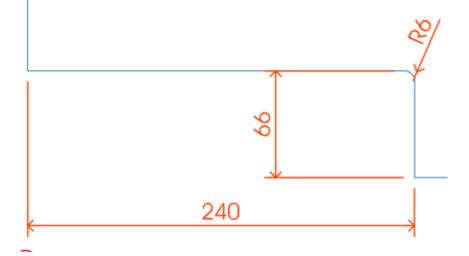

# Products in this set

×	44704.1 - Surface Mounted Double Action Floor Spring Patch Door Closer For Glass Doors - Adjustable Power Size 3-5 - Max Door Width 1250mm - Max Door Weight 100kg - Satin Stainless Steel
×	44704.2 - Surface Mounted Double Action Floor Spring Patch Door Closer For Glass Doors - With Mechanical Hold Open - Adjustable Power Size 3-5 - Max Door Width 1250mm - Max Door Weight 100kg - Satin Stainless Steel