
**Ball Bearing Grade 13 Fire Rated Hinges - CE / UKCA Marked - Certifire Approved - 102mm x 76mm -
Satin Brass Plated**

Product Images



Description

- Grade 13 ball bearing hinges -102mm x 76mm (4" x 3")
- Satin brass finish
- One hour fire rated hinges suitable for use on internal or external timber doors
- Tested and passed to the British / European standard BS EN 1935 suitable for use on fire doors up to 120kg in weight
- Ball bearings located in the knuckle of hinge provide a smooth action and excellent strength.


Base Material

- Stainless steel

Finish

- Satin brass

Dimensions

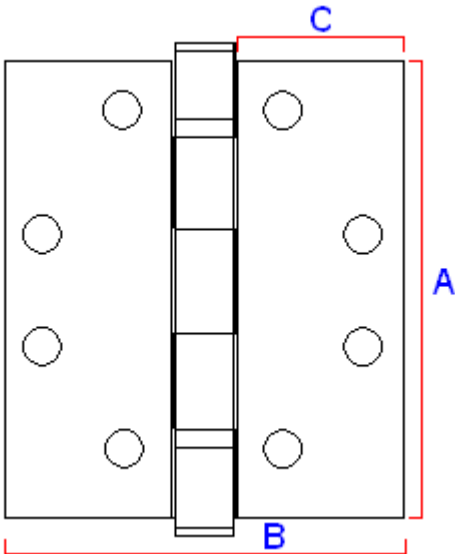

	44769.1	Dimension On Diagram
Height (H)	102mm	A
Width (W)	76mm	B
Leaf Width	30mm	C
Knuckle Diameter	16mm	D
Thickness	3mm	N/A

Standards This Product Conforms To

- Tested and passed to BS EN 1935* the British / European standard requirements and testing methods covering single axis hinges. Classification number - **4-7-6-1-1-4-0-13**.
- ***To meet this standard 2mm thick intumescent liners should be fitted behind each leaf of the hinge.**
- Tested and passed to BS EN 1634 the British / European standard for determining the fire resistance of door and shutter assemblies including hardware. These hinges have been assessed for use on 30 minute and 1 hour timber fire doors FD30 / FD60.

- CE Marked / UKCA Marked
- Certifire approved CF339

Classification Details

- Durability grade 7 - tested to 200,000 opening & closing cycles
- Test door mass grade 6 - suitable for use on doors up to 120kg in weight
- Corrosion resistance grade 4 - high resistance to corrosion in accordance to EN 1670
- Overall hinge grade 13

Usage

- Suitable for use 44mm and 54mm thick wooden doors
- To pass fire regulations three hinges must be fitted per door (pair and a half).

Unit Of Sale

- Sold and priced in **pairs (2 hinges)** and supplied with fixing screws.

Products in this set



44769.1 - Ball Bearing Grade 13 Fire Rated Hinges - CE / UKCA Marked - Certifire Approved -120kg Weight Limit - 102mm x 76mm - Satin Brass Plated - Pair - (2 Hinges)