

G Johns & Sons Ltd Unit D Westside Business Centre Flex Meadow Harlow, Essex CM19 5SR www.gjohns.co.uk 020 8360 7771 sales@gjohns.co.uk

Concealed Blum Style Soft Close Hinge - 18mm Thick Standard Overlay Doors

Product Images






Description

- High-quality concealed blum soft close hinge and 3 way adjustable clip on mounting plate.
- Our blum soft close hinges are suitable for doors that overlay the carcass only. (Overlay doors sit on top of cupboard door frame.
- High architectural quality "clip on" design with built in soft closing device. No more slamming cupboard doors, just a gentle push and the cabinet door will self close coming to a controlled soft stop.
- 3 way adjust-ability the door can be adjusted vertically (moving the door up and down) horizontally (moving the door side to side) in and out (moving the door from or towards the carcass)
- Heavy duty this blum soft close hinge has been tested and passed to BS 6222-22009 test level H suitable for use in high or heavy use areas.
- Sprung hinge keeps door held closed no need for any kind of cupboard catch.
- Standard 35mm diameter cup with a 100 degree opening angle
- Our blum soft close hinges comes supplied adjustable clip on mounting plate.

Suitable For Use On Overlay Style Doors Only


- Overlay blum soft close hinge suitable for doors that sit on top of the cabinet carcass.
- Below diagram shows how an overlay hinge is fitted. (Notice how the door sits in front of the cupboard frame.)

FULL OVERLAY DOOR



Clip On Design

- This hinge comes supplied with an adjustable clip on mounting plate, which allows the door to be fully adjusted and then quickly removed by simply pushing a small button at the very tip of the hinge.
- Below diagram shows how the concealed blum style hinge clips on and off from the mounting plate.

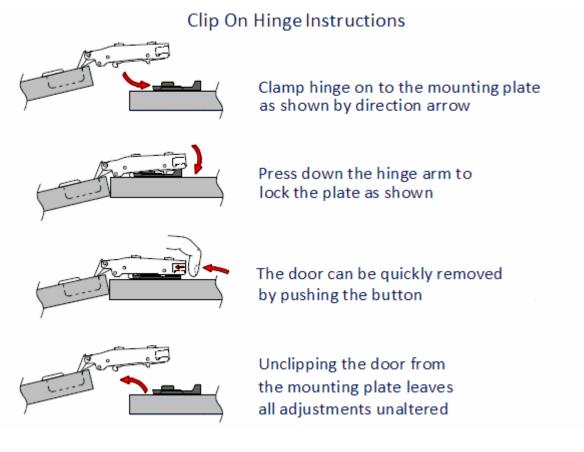

Base Material


• Our concealed blum soft close hinges are made from steel.

Finish Details

• Bright zinc plated.


3 Way Adjustable Hinge

- This overlay blum soft close hinge can be adjusted in 3 directions. (see below diagram.)
- Lateral adjustment turning the screw nearest to cup allows the door to move side to side with a total movement of 5mm possible.
- Front to back adjustment turning the screw at the tip of the hinge adjusts the door away from or toward the carcass with a total movement of 3.5mm possible.
- Vertical adjustment turning the cam operated screw on the mounting plate adjusts the height the of the door up and down with a total movement of 4mm possible.




Lateral Adjustment Moving Door Left – Right

Total Movement Of 5mm Possible



Front To Back Adjustment Spacing Door Off Carcass

> Total Movement Of 3.5mm Possible



Vertical Adjustment Moving Door Up & Down

Total Movement Of 4mm Possible

Size Details

- Standard 35mm diameter cup. (Hole diameter required to be drilled into the door.)
- 100 Degree opening angle.

Unit Of Sale

- The overlay concealed blum style cabinet hinge is sold individually. (Each)
- Our blum soft close hinges comes supplied with adjustable clip on mounting plate and screws to suit 18mm thick door and carcass.

Products in this set



15477.1 - Concealed Blum Style Hinge - With Built In Soft Close - To Suit 18mm Thick Standard Overlay Doors - Zinc Plated - (1 Hinge)