

Unit D Westside Business Flex Meadow Harlow, Essex

www.gjohns.co.uk 020 8360 7771 sales@gjohns.co.uk VAT No: GB232661872 Company No: 00384076

## Bauhaus Light Switch & Socket Range - Flat Plate With Squared Edges - Satin Nickel

CM19 5SR

£0.00 exc VAT: **£0.00** 

#### **Product Images**

G Johns s on s



# Please see the product attachments tab below, to download the price list for this range

Please give us a call or email to place an order.

#### **Description**

- Bauhaus flat plate range of light switches, dimmers and sockets.
- Flat plate design with squared edges BH5 design.
- 3mm thick plate.

#### Finish

- Satin nickel finish plate.
- Matching satin nickel switches.
- Choice of black or white trims.

#### Sizes

- Single plate 88mm x 88mm.
- Double plate 148mm x 88mm.

#### **Specials**

• If you're unable to find switch of socket you require in the list below, please contact us as we're able to produce a wide range of specials.

#### Rocker Switches - 10amp - 25mm Box Depth Required








- 1 Gang 2 Way Rocker Switch
- 2 Gang 2 Way Rocker Switch
- 3 Gang 2 Way Rocker Switch
- 4 Gang 2 Way Rocker Switch
- 1 Gang Intermediate Rocker Switch

Dolly Toggle Switches - 10amp - 35mm Box Depth Required












- 1 Gang 2 Way Dolly Toggle Switch
- 2 Gang 2 Way Dolly Toggle Switch
- 3 Gang 2 Way Dolly Toggle Switch
- 4 Gang 2 Way Dolly Toggle Switch
- 1 Gang Intermediate Dolly Toggle Switch

#### Dimer Switches - 35mm Box Depth Required











- 1 Gang Dimmer Switch 250 Watts
- 1 Gang Dimmer Switch 400 Watts
- 1 Gang Dimmer Switch Trailing Edge For LED Bulbs
- 2 Gang Dimmer Switch 250 Watts
- 2 Gang Dimmer Switch 400 Watts
- 2 Gang Dimmer Switch Trailing Edge For LED Bulbs
- 3 Gang Dimmer Switch 250 Watts
- 3 Gang Dimmer Switch 400 Watts
- 3 Gang Dimmer Switch Trailing Edge For LED Bulbs
- 4 Gang Dimmer Switch 250 Watts
- 4 Gang Dimmer Switch 400 Watts
- 4 Gang Dimmer Switch Trailing Edge For LED Bulbs

#### Switched Power Switches - 13amp - 35mm Box Depth Required







- Single Switched Socket
- Double Switched Socket
- Double Switched Socket With USB Chargers (1x 1amp USB and 1 x 2amp USB)

#### Fused Spurs - 13amp - 35mm Box Depth Required










• Fused Spur

- Switched Fused Spur
- Switched Fused Spur With Neon Indicator
- Switched Fused Spur With Neon & Flex Outlet

#### **Euro Module Plates**








- 1 Module Euro Plate
- 2 Module Euro Plate
- 4 Module Euro Plate

#### Cooker Switches - 45amp - 35mm - 48mm Box Depth Required











- Double Pole Switch
- Double Pole Switch With Neon Indicator
- Cooker Switch (Single Plate)
- Cooker Switch With 13amp Single Socket







- Triple Pole Fan Isolation Switch 6amp 25mm Box Depth
- Round 3 Pin Socket (Unswitched) 5amp 35mm Box Depth
- Shaver Socket With Dual Output 110v / 240v 48mm Box Depth

#### TV & Satellite Sockets - 35mm Box Depth Required














- Single Non-Isolated TV / Coaxial Socket
- Single Isolated TV / Coaxial Socket
- Twin Non-Isolated TV / Coaxial Socket

- TV/FM Diplexed Coaxial Socket
- Satellite Socket
- TV / Satellite Socket

#### Telephone & Data Sockets - 35mm Box Depth Required

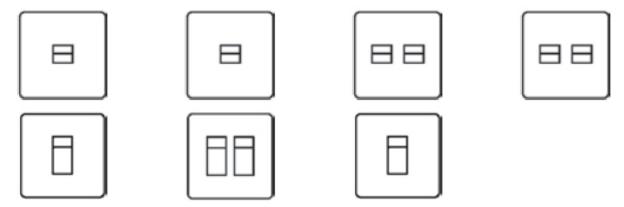

- 1 Gang Secondary Telephone Line Socket
- 1 Gang Master Telephone Line Socket
- 2 Gang Secondary Telephone Line Socket
- 2 Gang Master Telephone Line Socket
- 1 Gang RJ45 Data Socket
- 2 Gang RJ45 Data Socket
- 1 Gang RJ11 Socket

#### **Blanking Plates**



- Single Section Blank Plate
- Double Section Blank Plate

### **Important Information:**

 $\bullet~$  USB sockets are fitted with 1 x 1amp USB charger and 1 x 2amp USB charger.

#### **Trailing Edge Dimmers for LED bulbs**

- Maximum of 10 LED lamps per module.
- Minimum load 0 W per module. Maximum load 120 W per module.
- Suitable for most quality dimmable LED lamps.
- Compatibility is not guaranteed with all LED bulbs.

#### **Box Depth**

- When installing electrical accessories it is important to ensure that wall boxes of adequate depth are used.
- The box depth should comfortably accommodate the accessory and its connecting cables, and is particularly important with flat plate ranges and power accessories.
- The product selector table above gives recommended box depths for normal installation conditions.