


Slimline Single Magnet Supplied With Z & L Brackets - Tested to Grade 2 TS010:2016 - Fire Rated FD30 / FD60 Timber Doors - 12/24v DC

Product Images



Description

- The Deedlock slimline range of mini Electro-magnetic locks have been fully tested to TS010:2016 and meet the requirements of grade 2 holding force. The comprehensive system of low profile magnets are suitable for secondary security or low to medium security on internal doors.
- A number of accessories are available, including; Z & L brackets for inward opening doors, L bracket for outward opening doors.

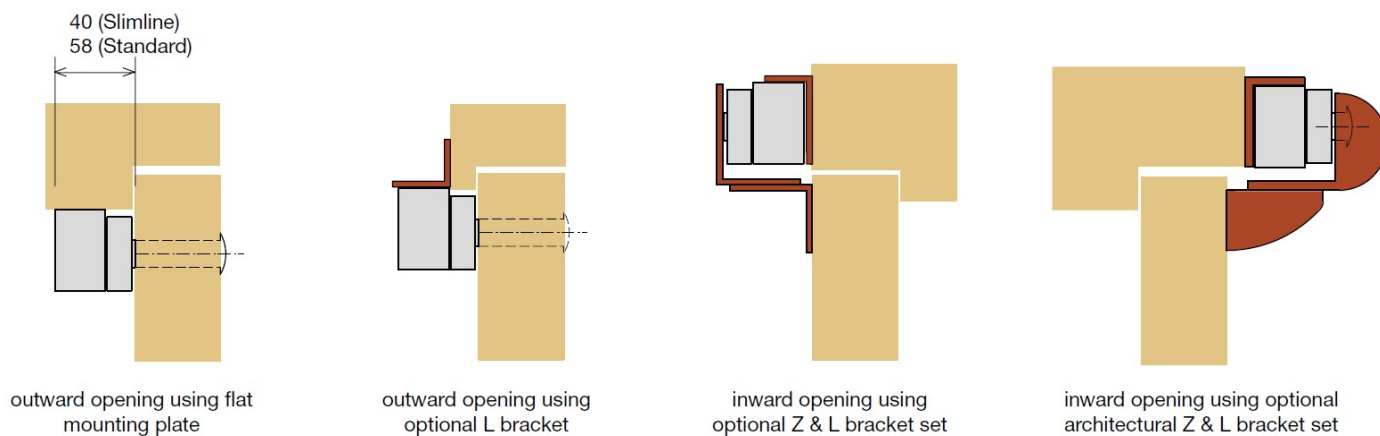

Features

- CE Marked / UKCA Marked
- Low maintenance with no moving parts
- Safety bolts prevent the magnet from detaching from the bracket itself
- Dual voltage 12 / 24V DC
- Suitable for single or double doors, Inward or outward opening
- Time delay option available
- Satin anodised aluminium finish
- For medium usage traffic applications
- Minimum Holding Force: Grade 2 - 2000N (450lbs/f)
- Tested Holding Force: 2090N (470lbs/f) (213 kg/f)


Certification

- TS010:2016 – Report Number WTE-16-030
- Classification Code:
 - Monitored 3-7-B-1-3-2-2-A
 - Unmonitored 3-7-B-1-3-2-0-A
- Fire rated to EN1634-1 on Timber Doors for 30 & 60 minutes - When fitted with **49675.1 - Intumescent Graphite Sleeve**
- EN61000-6-3:2007 + A1:2011
- EN61000-6-1:2007

Finish

- Satin Stainless Steel

Size Information

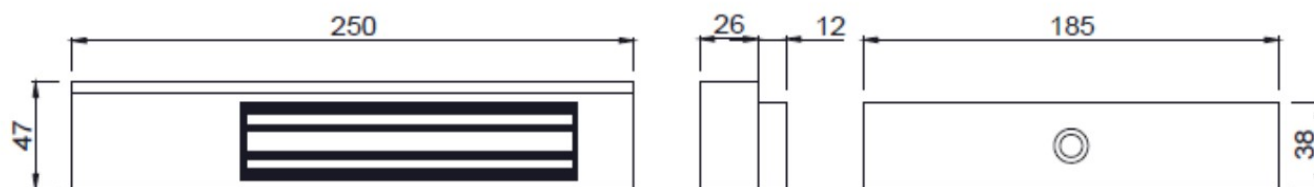

- 500mm x 47mm

Fixings

- Supplied with matching screws.

Unit Of Sale

- Sold individually - Each

Related product

- 49675.1 - Intumescent Graphite Sleeve For Single Face To Face Electromagnetic Locks - Tested For Use With FD30 / FD60 Fire Doors

Products in this set



48738.1 - Slimline Single Magnet Unmonitored Supplied With Z & L Brackets - Tested to Grade 2 TS010:2016 - Fire Rated For Use On FD30 / FD60 Timber Doors - 12/24v DC - 250mm x 47mm