


G Johns & Sons Ltd Unit D Westside Business Centre Flex Meadow Harlow, Essex CM19 5SR www.gjohns.co.uk 020 8360 7771 sales@gjohns.co.uk VAT No: GB232661872 Company No: 00384076

Intumescent Fire and Smoke Rated Telescopic Sleeved Letterbox - 30 Minute FD30 Tested - 272mm x 70mm

Product Images

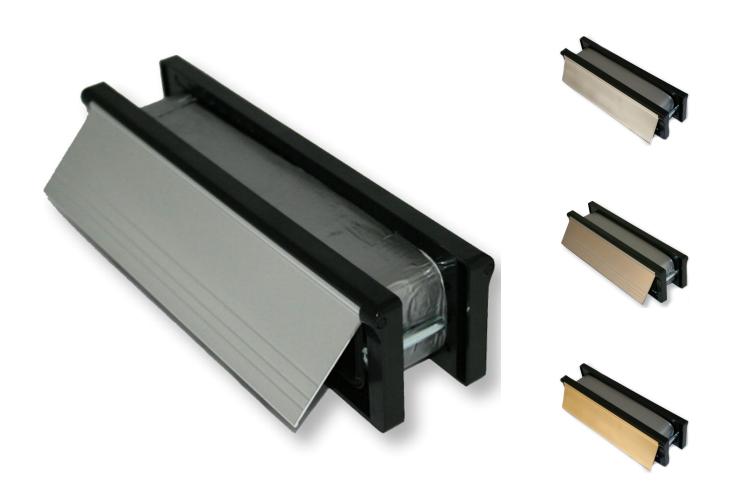

Description

- Fire rated intumescent sealed letter plate, designed for use on fire rated doors, ideal for use in block of flats.
- 272mm x 70mm overall size.
- ABS black framed, telescopic letterbox, with metal flaps and fitted with a high performance intumescent liner.
- In the event of fire the intumescent liner expands rapidly and seals off the letter plate opening, preventing the spread of fire and smoke whilst maintaining the integrity of the fire door assembly.
- Letterbox flaps open to 180 degrees.

- Adjustable telescopic sleeve set to suit 40mm 80mm door thickness.
- Fitted with brush pile draught excluder.
- Integral sound dampening bumpers.
- Ergonomic curved edge design.
- Fully sealed backplate

Testing & Standards:


- Fire tested to BS 476 part 22: 1987, 30 minute rated suitable for use of FD30 fire doors.
- Smoke tested to BS 476 Part 31/1: 1983.
- Acoustic tested to BS EN ISO 140-3:1995 Achieving 32dB Rw.
- Security tested to BS EN 13724 Clause 6.6.5.

Finishes:

- 31204.5 Satin stainless steel flap with black frame.
- 31204.4 Satin anodised aluminium (SAA) flap with black frame.
- 31204.3 Polished chrome flap with black frame.
- 31204.1 Polished gold aluminium (brass effect) flap with black frame.
- 31204.2 Polished brass flap with black frame.

Dimensions:

- Overall frame size 272mm x 70mm
- Apperture size 221mm x 37.5mm
- Sleeve depth minimum 40mm maximum 80mm
- Flap opening angle 180 degrees

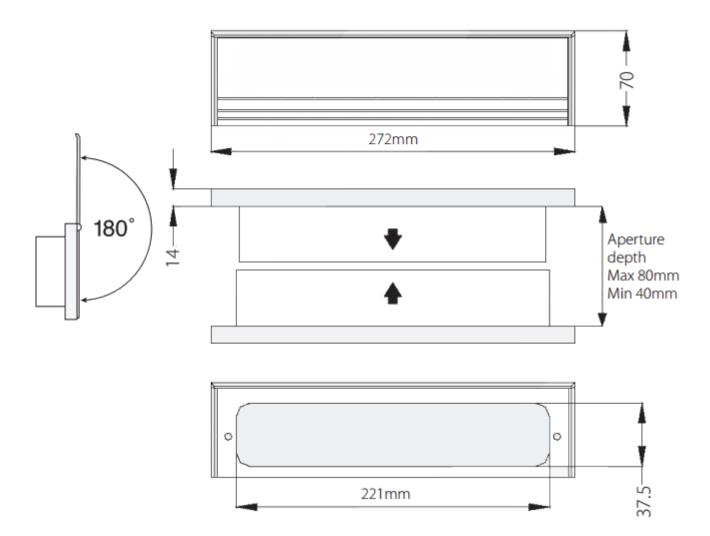

Sold Per:

- Sold as a set.
- Set includes inner and outer sleeved flaps with internal brush and intumescent seal.

Products in this set

