

G Johns & Sons Ltd Unit D Westside Business Centre Flex Meadow Harlow, Essex CM19 5SR www.gjohns.co.uk 020 8360 7771 sales@gjohns.co.uk VAT No: GB232661872 Company No: 00384076

TS007 1 Star Rated - BS Kitemarked - 6 Pin Anti Snap Euro Cylinders High Security Range - Key & Thumb Turn - Polished Chrome

Product Images



Description

- High security 6 pin Euro profile cylinders that are BS Kitemarked (KM585549) to TS 007:2012 rated to 1 star.
- Designed for use on external doors including timber and uPVC front and back doors. This range of high security cylinders are designed to help stop against snapping techniques used by burglars.

- Key operation from one side of the door and thumbturn operation from the other (Key / Turn).
- Polished chrome plated (shiny mirror like finish).
- Euro cylinders are the "barrels" that go through the middle of a door, commonly found of uPVC front doors.
- Key / Turn knob cylinders are Ideal for use on internal doors where a room or area is required to be key locked from the outside for security, but requires the facility to be able to unlock the door in case of an emergency via the internal thumb turn knob.
- Ideal for use in bedrooms and office rooms or any room where the might need to be unlocked quickly without the use of a key.
- Not suitable for use on fire escape doors as an emergency exit device.
- Excellent high level security range with a high quality architectural finish.
- Police preferred specification Secured By Design (SBD) approved.
- Tested to BS EN 1303 Security grade 2
- Ideal for use on internal or external doors including front doors.
- Supplied with 3 specially manufactured, hard wearing silver nickel keys as standard.

Operation

- Double cylinder key operation from outside side (secure side) and thumb turn operation from the inside of the door (non secure side).
- The door can be locked and un-locked by turning the thumb turn knob from the inside or via key on the outside.
- Key differed if ordering more than one, the cylinders will come with different keys.
- Suitable for use on wooden, UPVC and metal doors.
- Must be used in conjunction with some form of Euro profile mortice lock or multi-point locking system (sold separately).

Security Level

- Excellent high level security with 6 pins and anti-snap body.
- Tested to BS EN 1303 Grade 2.
- BS rated meets the new Technical standard TS 007:2012 1 star rated.
- BS Kitemarked number KM 585549.
- Police preferred specification Secured By Design (SBD) approved.

Anti-snap design with the following features

- Snap off front section via (sacrificial cut). If an attempt is made to snap the cylinder, it will break in a pre-designed position which helps prevent burglars from manipulating the cam in the middle of the cylinder.
- 6 Hardened steel Anti-Drill pins, plugs and disc.
- Anti-plug pull feature.
- Anti-twist.
- Anti-pick.
- Anti-bump.
- Suitable for use on internal or external doors including front doors where a high level of security is required.
- If fitting a thumb turn cylinder to a front or back door be aware that if a burglar were to break any glass in the door they could in theory reach down to thumb turn and unlock the mortice lock.

Finish


• Polished chrome - (shiny finish.)

Alternative Finishes Available

- Satin chrome
- Polished brass

Dimensions

• Equal cylinders (each side of the cam is the same size.)

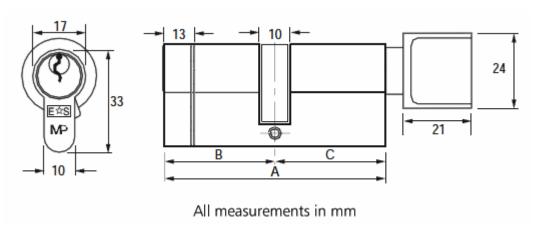

Equal cylinders for use with timber doors or doors with a mortice lock fitted in the middle of the door.

Item Code Overall Length (A)External Side (B)Internal Side (C)Anti-Snap Section


31257.6	70mm	35mm	35mm	13mm
31257.7	80mm	40mm	40mm	10mm
31257.8	90mm	45mm	45mm	10mm
31257.1	100mm	50mm	50mm	10mm

Offset cylinders for use with uPVC / composite doors or doors where the lock is NOT fitted in the middle of the door.

Item Code Overall Length (A)External Side (B)Internal Side (C)Anti-Snap Section

31257.2	80mm	35mm	45mm	13mm
31257.3	100mm	40mm	60mm	13mm
31257.4	80mm	45mm	35mm	13mm
31257.5	100mm	60mm	40mm	13mm

- To determine out the length of cylinder you require you need to add together
- $\bullet\,\,$ The thickness of the door. (D) on the below diagram.
- - Plus the thickness of the escutcheon / backplate on each side of the door. (E) on the diagram below.

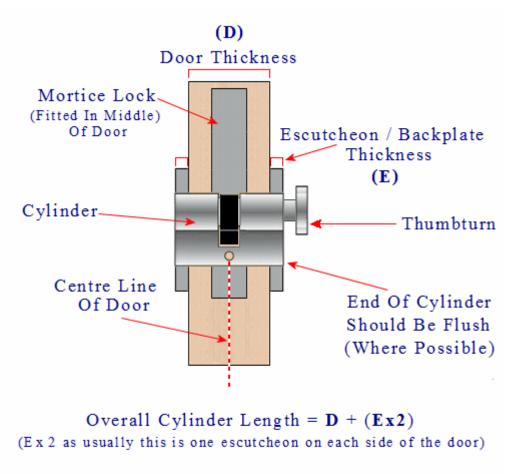

Always check the mortice lock is fitted in the middle of the door if not an offset cylinder is required

- For security reasons it's best where possible to have the Euro cylinder finish flush (flat) with the edge of the escutcheon or backplates of the handles fitted to the door.
- Cylinders that stick out past escutcheons and backplates of handles are much more vulnerable to attack as they can more easily be hammered, twisted or cut during an attack.

Standards This Product Conforms To

- The Euro profile cylinders have been included on a successful fire test to BS EN1634: Part 1 2000 Assessed for use on 30 minute and 1 hour fire doors FD30 / FD60.
- Police preferred specification Secured By Design (SBD) approved.
- Tested to BS EN 1303 the British / European standard requirements and testing methods covering cylinders for locks. This cylinder range has been tested to cylinder security grade 2.
- Tested to the Technical standard TS 007:2012 rated to 1 star.
- 3 star rating possible when used in conjunction with 2 star rated furniture.

Options Available To Order

- Keyed Alike (KA) A batch of cylinders all under the same one key.
- Under Master Key (UMK) A batch of cylinders all under different keys with one master key which operates any of the cylinders.
- Please contact us for more information and lead times and prices for the above options.

Unit Of Sale

• Each - (1x cylinder with 3x keys and 1x fixing screw.)

Products in this set

