

G Johns & Sons Ltd Unit D Westside Business Centre Flex Meadow Harlow, Essex CM19 5SR www.gjohns.co.uk 020 8360 7771 sales@gjohns.co.uk

Eclisse Fire Rated Sliding Pocket Door System - Single Fire Door FD30 Kit - 100mm Finished Wall Thickness - Supplied With White Intumescent Seals

Product Images





Short Description

Please note as of June 2023 the Eclisse fire door kit is ONLY certified for use with particular fire doors.


Please see the below link for doors which meet the fire test requirements.

FD30 Fire Doors Tested For Use With The Eclisse Fire Door Kit

Please note doors are NOT included with this kit.

Description

- Eclisse sliding pocket door gear system for use with FD30 rated fire doors. Fully tested and approved to BS EN 1634-12008 by Cambridge Fire Research, UKAS approved testing authority.
- Suitable for use with 30 minute (half hour) fire doors only.
- Allows an interior door to slide into a "pocket" within the wall cavity.
- Each set includes all the main components needed to install a long lasting, smooth running sliding fire door including steel wrapped studs used to create the wall cavity or "pocket" for the door to slide into.
- This high quality sliding door gear is suitable for residential and commercial applications. The unique design allows doors between 35mm-45mm thick to be installed with a finished wall of 100 mm.
- Supplied as a kit to create the pocket, which can be fully fitted in under 60 minutes by a skilled installer.
- Suitable for use with timber fire rated doors only please note doors are supplied with white intumescent seals
- Unlike other pocket door systems on the market the Eclisse fire rated system comes supplied complete with timber jambs and architraves.
- Doors not included.

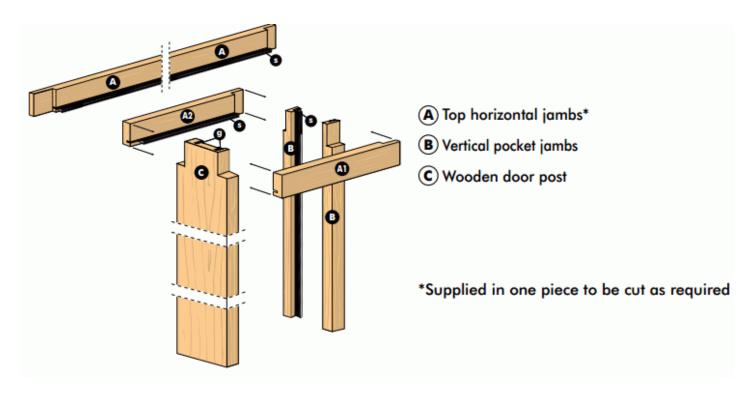


Accessories Available To Suit Eclisse System

• Anti-Slam / Soft close mechanism - to dampen softly close the sliding door - 43129.1 - (sold separately).

Features & Benefits


- Space saving sliding doors help create up to 8% more living more space within a property
- Easy access
- Quiet operation
- Easy installation
- Economical
- Prefabricated components

Dimensions - Frame Sizes & Door Kit Sizes Available

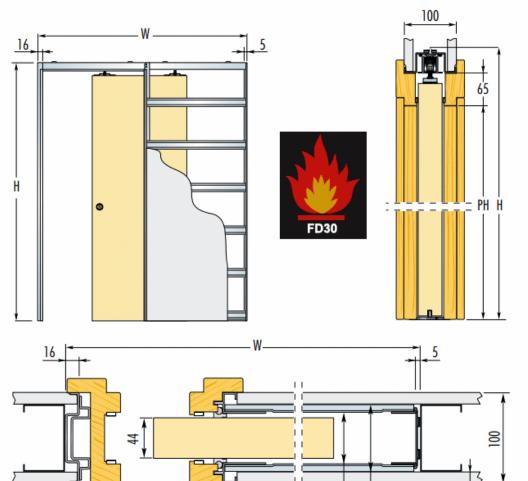

1.1

PW



N.B. Non standard sizes on request

Item Code	Door Size (DW x DH)	Max Passage Size (PW x PH)	Overall Frame Size (W x H)	Finished Wall Thickness
40161.1	610mm x 1981mm - (2ft. 0in. x 6ft. 6in.)	563mm x 1951mm	1279mm x 2061mm	100mm
40161.2	686mm x 1981mm - (2ft. 3in. x 6ft. 6in.)	639mm x 1951mm	1455mm x 2061mm	100mm
40161.3	762mm x 1981mm - (2ft. 6in. x 6ft. 6in.)	715mm x 1951mm	1631mm x 2061mm	100mm
40161.4	838mm x 1981mm - (2ft. 9in. x 6ft. 6in.)	791mm x 1951mm	1707mm x 2061mm	100mm
40161.5	914mm x 1981mm - (3ft. 0in. x 6ft. 6in.)	878mm x 1951mm	1894mm x 2061mm	100mm
40161.6	626mm x 2040mm	578mm x 2010mm	1294mm x 2120mm	100mm
40161.7	726mm x 2040mm	678mm x 2010mm	1494mm x 2120mm	100mm
40161.8	826mm x 2040mm	778mm x 2010mm	1694mm x 2120mm	100mm
40161.9	926mm x 2040mm	878mm x 2010mm	1894mm x 2120mm	100mm
40161.10	1026mm x 2040mm	978mm x 2010mm	2094mm x 2120mm	100mm

75

58

12,5

• Please note fire-board (fire rated plasterboard) is not provided with this kit and must be bought separately.

• 15mm x 4mm Intumescent fire seals must be fitted into the door jamb - supplied with white intumescent seals

Items Included Within The Eclisse Pocket Sliding Door Kit

- Metal frame work to create the "pocket"
- Screws to fix plasterboard to metal frame (Plasterboard not supplied)
- Roller bearing door hanger kit
- Timber lining kit (door jamb kit with integrated architraves)
- 15mm x 4mm White intumescent fire seals
- Doors not included.

Installation Video

Products in this set

×	40161.1 - Eclisse Sliding Pocket Door - Single FD30 - 100mm Finished Wall Thickness - Door Size - 610mm x 1981mm - Supplied With White Intumescent Seals
×	40161.2 - Eclisse Sliding Pocket Door - Single FD30 - 100mm Finished Wall Thickness - Door Size - 686mm x 1981mm - Supplied With White Intumescent Seals
×	40161.3 - Eclisse Sliding Pocket Door - Single FD30 - 100mm Finished Wall Thickness - Door Size - 762mm x 1981mm - Supplied With White Intumescent Seals
×	40161.4 - Eclisse Sliding Pocket Door - Single FD30 - 100mm Finished Wall Thickness - Door Size - 838mm x 1981mm - Supplied With White Intumescent Seals
×	40161.5 - Eclisse Sliding Pocket Door - Single FD30 - 100mm Finished Wall Thickness - Door Size - 914mm x 1981mm - Supplied With White Intumescent Seals
×	40161.6 - Eclisse Sliding Pocket Door - Single FD30 - 100mm Finished Wall Thickness - Door Size - 626mm x 2040mm - Supplied With White Intumescent Seals
×	40161.7 - Eclisse Sliding Pocket Door - Single FD30 - 100mm Finished Wall Thickness - Door Size - 726mm x 2040mm - Supplied With White Intumescent Seals
×	40161.8 - Eclisse Sliding Pocket Door - Single FD30 - 100mm Finished Wall Thickness - Door Size - 826mm x 2040mm - Supplied With White Intumescent Seals
×	40161.9 - Eclisse Sliding Pocket Door - Single FD30 - 100mm Finished Wall Thickness - Door Size - 926mm x 2040mm - Supplied With White Intumescent Seals
×	40161.10 - Eclisse Sliding Pocket Door - Single FD30 - 100mm Finished Wall Thickness - Door Size - 1026mm x 2040mm - Supplied With White Intumescent Seals