

Architectural Quality DIN Style Euro Profile Sash Lock - CE / UKCA Marked - Fire Rated - Certifire Approved - 60mm Backset - 72mm Centres - Polished Brass PVD Plated

Product Images



Description

- 40672.1 - Euro profile DIN standard mortice sash lock.
- PVD brass finish.
- Case size 150mm x 85mm.
- 60mm backset - 72mm euro to spindle centers.
- Satisfies BS 8300 and Approved Doc M (ADM). - Suitable for use in public and commercial buildings.
- For use on doors that require lever door handles and need to be locked via a euro profile cylinder.

- Must be used in conjunction with some form of door handle and a euro cylinder.
- Comes supplied with a PVD brass forend and frame mounted strike plate.

Operation

- Latch is withdrawn via a lever handle from either side of the door. (handles sold separately).
- Deadbolt is locked and un-locked via a Euro profile cylinder.
- One single turn of the key or thumb-turn on the Euro cylinder will completely throw the 20mm dead bolt.

Features

- Heavy duty lock case and stainless steel striker plate for the door frame.
- Solid stainless steel deadbolt and latch.
- Dual latch springing - spring strength can be adjusted on site to suit sprung or un-sprung lever furniture.
- Bolt through facility for bolt together fixing of lever handles and accessories at 38mm centers.
- Solid investment cast 8mm x 8mm spindle follower (to suit standard UK size spindles).
- 20mm bolt throw with a single turn of a key.
- 10 year mechanical guarantee as standard.
- Patented Easy turn latch reversal mechanism - latch can be reversed on site without taking the lock case apart.
- Reversible and adjustable strike plate.
- Complete with black plastic frame box keep to sit behind the strike plate.

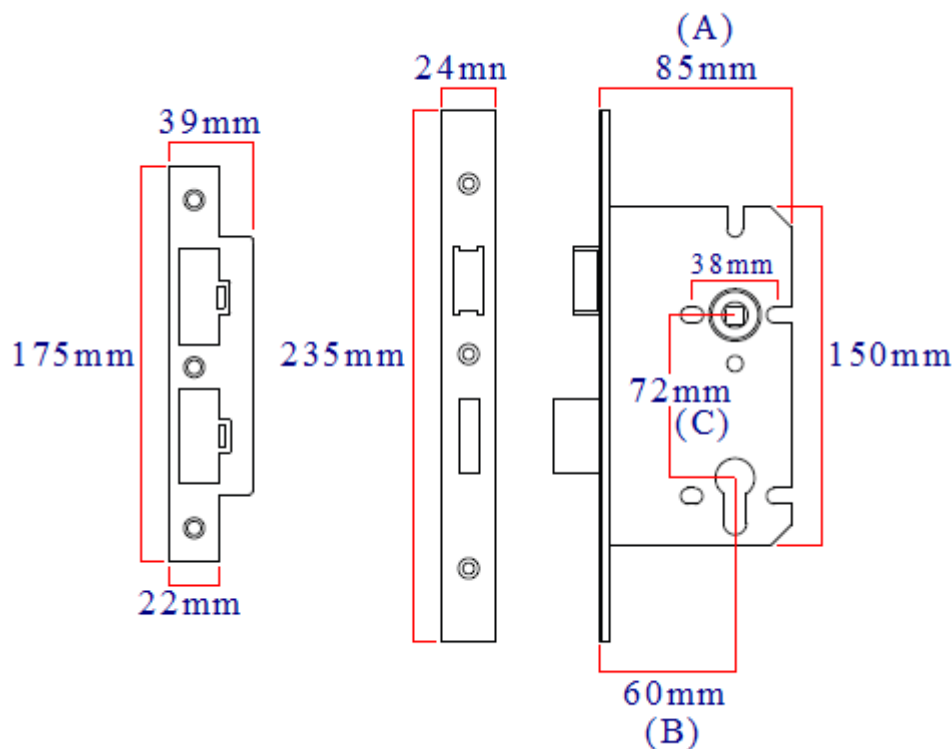
Finish

- PVD brass

Alternative Finishes Available

- Polished stainless steel
- Satin stainless steel

Dimensions



Item Code Lock Case Depth (A) Backset To Keyhole (B) Spindle To Euro centers (C)

40672.1

85mm

60mm

72mm

Standards This Product Conforms To

- Lock case tested and passed to BS EN 12209. The British / European standard requirements and test methods covering locks and latches. Classification number - **3M810F3BA00**.
- Tested and passed to BS EN 1634 the British / European standard for determining the fire resistance of door and shutter assemblies including hardware. Assessed for use on 30 minute and 1 hour timber fire doors FD30 / FD60.- Intumescent lock case liners required (sold separately).
- Certifire approved.
- CE Marked / UKCA Marked.
- Declaration of performance (DoP) - ***please see the additional information tab to download the certificate.***

Options Available To Order

- This lock is also available to order with radius (rounded shape) forend and strike plates. Please contact us for lead times and prices.
- Intumescent lock case liners to suit the E*S DIN standard lock range are available. Please see our intumescent fire rated products category.

Rebate Kit For Double Rebated Doors

- 40836.1 - 13mm PVD brass rebate kit for use with DIN lock.

Unit Of Sale

- Each - (1 x lock case supplied with forend, strike plate and black plastic back box).

Products in this set



40672.1 - Architectural Quality DIN Style Euro Profile Sash Lock - CE / UKCA Marked - Fire Rated - Certifire Approved - 85mm Case Depth (60mm backset) - 72mm Euro Centres - Polished Brass PVD Plated