


G Johns & Sons Ltd Unit D Westside Business Centre Flex Meadow Harlow, Essex CM19 5SR www.gjohns.co.uk 020 8360 7771 sales@gjohns.co.uk VAT No: GB232661872 Company No: 00384076

#### Polymer Bearing Grade 13 Hinges - CE / UKCA Marked - Fired Rated - Certifire Approved - 120kg Weight Limit - 102mm x 76mm - Antique Brass (Lacquered)

#### **Product Images**






#### **Description**

- Grade 13 polymer bearing antique brass hinges.
- Fire rated, CE Marked / UKCA Marked and Certifire approved
- Tested and passed to British standard EN.1935 2002 overall grade 13.
- Tested to grade 7 door mass suitable for doors up to 120kg in weight.
- The bearing avoid metal to metal movement by using polymer bushes in the knuckle, impregnated with a specially formulated lubricant, This construction eliminates the wear and regular maintenance required by other types of hinge.

# Dimensions

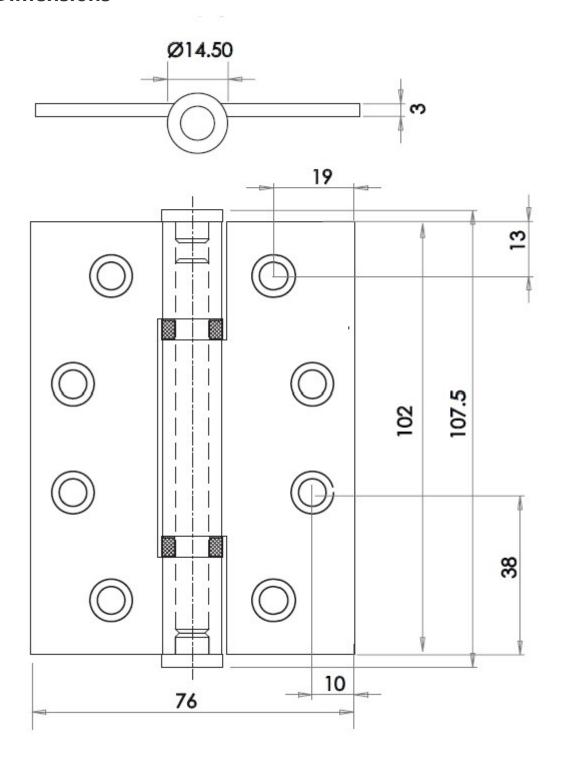

	48341.1	Dimension On Diagram
Height (H)	102mm	Α
Width (W)	76mm	В
Leaf Width	30mm	С
Thickness	3mm	N/A

## **Base Material**

Stainless steel

### **Finish**

• Antique brass

## Standards This Product Conforms To

- Tested and passed to BS EN 1935\* the British / European standard requirements and testing methods covering single axis hinges. Classification number 4-7-7-1-1-4-0-14.
- \*To meet this standard 2mm thick intumescent liners should be fitted behind each leaf of the hinge.
- Tested and passed to BS EN 1634 the British / European standard for determining the fire resistance of door and shutter assemblies including hardware. These hinges have been assessed for use on 30 minute and 1 hour timber fire doors FD30 / FD60.
- CE Marked / UKCA Marked
- Certifire approved

#### **Classification Details**

- Durability grade 7 tested to 200,000 opening & closing cycles
- Test door mass grade 7 suitable for use on doors up to 120kg in weight
- Corrosion resistance grade 4 high resistance to corrosion in accordance to EN 1670
- Overall hinge grade 13

## **Usage**

- Suitable for use 44mm and 54mm thick wooden doors
- To pass fire regulations three hinges must be fitted per door (pair and a half).

## **Unit Of Sale**

• Sold and priced in pairs (2 hinges) supplied with fixing screws.

#### **Products in this set**



48341.1 - Polymer Bearing Grade 13 Hinges - CE / UKCA Marked - Fired Rated - Certifire Approved - 120kg Weight Limit - 102mm x 76mm - Antique Brass (Lacquered) - Pair