

G Johns & Sons Ltd Unit D Westside Business Centre Flex Meadow Harlow, Essex CM19 5SR www.gjohns.co.uk 020 8360 7771 sales@gjohns.co.uk VAT No: GB232661872 Company No: 00384076

Return To Door Safety Design Round Rose Lever Handles Only - Heavy Duty Grade 4 Collection BS800 / ADM Compliant - Satin Stainless Steel (Grade 316)

Product Images



Description


- Return to door safety design round rose lever handles.
- Heavy duty commercial range tested to grade 4.
- Satin stainless steel grade 316 material.
- Suitable for commercial projects and public buildings,
- Concealed bolt through fixings via screw on rose.
- Tested to BS EN 1906:2012 classification number 47-1140B category of use grade 4
- Suitable for use on fire rated doors tested to BS EN 1634
- Matching accessories available including standard escutcheons (keyhole covers) and a bathroom turn & release set.

How To Order Lever Handles With A Rose


• For Non-Locking Doors - 1 x (Pair) Lever Handles Only




• For Locking Doors - 1 x (Pair) Lever Handles Only + 2 x (Each) Standard Escutcheons



• For Euro Cylinder Locking Doors - 1 x (Pair) Lever Handles Only + 2 x (Each) Euro Escutcheons



• For Locking Bathroom Doors - 1 x Pair Lever Handles Only + 1 x (Set) Turn & Emergency Release



Matching Accessories

- Standard escutcheon (key hole cover to suit regular "chubb style locks")
- Euro profile escutcheon (key hole cover to suit euro profile cylinders) 43507.1
- Turn & emergency release (a thumbturn used to lock bathroom doors, WC's and toilet doors) 43509.1
- Disabled large turn & emergency release (a thumbturn used to lock bathroom doors, WC's and toilet doors) 43510.1

Base Material

• Made from marine grade 316 stainless steel.

Finish


• Satin stainless steel.

Operation

• Both levers are sprung to ensure the lever always returns to its starting position.

Dimensions

- Rose Diameter 55mm
- Rose Thickness 8mm
- Lever Diameter 19mm
- Lever Length 145mm

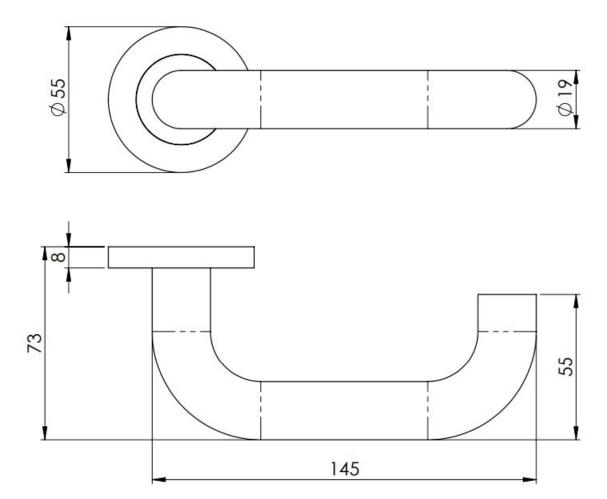

Spindle Size

• 8mm x 8mm square - UK Standard.

Fixings

- Concealed bolt together fixings via male and female bolts.
- Grub screw fixing to spindle for extra strength once fitted to the door.
- Comes supplied with male and female bolt through fixings and 8mm heso fixing spindle.

Usage

- Suitable for heavy duty commercial use.
- Suitable for internal or external use.

Unit Of Sale

• Lever handles are sold in pairs. (One pair consists of 1x left hand and 1x right hand).



43511.1 - Return To Door Safety Design Round Rose Lever Handles Only - Heavy Duty Grade 4 Collection BS800 / ADM Compliant - Satin Stainless Steel (Grade 316) - Pair