Harlow, Essex CM19 5SR



Architectural Quality Mortice Bathroom Lock - Matt White

Product Images



- Matt white finish architectural quality mortice bathroom lock.
- Privacy lock for use on bathroom doors, toilets and WC doors.
- For use on doors that require door handles and need to be locked via a thumb-turn and release system.
- Must be used in conjunction with some form of door handle.
- Supplied with matt white finish forend and frame mounted strike plate including black plastic back box.
- Special order lead time 4-6 weeks.

Operation

- Latch is withdrawn via a lever handle from either side of the door (handles sold separately).
- Deadbolt can be locked and un-locked via a bathroom thumb-turn and release system (sold separately).
- This lock can be released from the outside in case of an emergency when used in conjunction with a turn and release.
- Only a quarter turn is required on the thumb-turn to lock and un-lock the dead bolt.

Features

- Solid brass guided latch.
- Solid brass deadbolt with anti-saw rollers.
- Medium to heavy weight springing.
- Adjustable spring strength, ideal for use with sprung or un-sprung lever furniture. (Spring strength can be adjusted by simply removing a screw on the edge of the lock case).
- Bolt through facility for bolt together fixing lever handles and accessories at 38mm centres.
- 8mm x 8mm spindle follower (to suit standard UK size spindles).
- 5mm x 5mm thumb-turn spindle follower (to suit standard UK size turn and release systems).
- Patented Easi-T latch reversal mechanism the latch can be reversed on site without taking the lock case apart.
- Reversible and adjustable strike plate.

Security Level


- Medium security architectural range.
- Suitable for use on internal doors in residential, commercial or public buildings.
- Privacy lock.

Finish

Matt white

Dimensions

- Available in two sizes
- 64mm case depth (44mm backset).
- 76mm case depth (57mm backset).

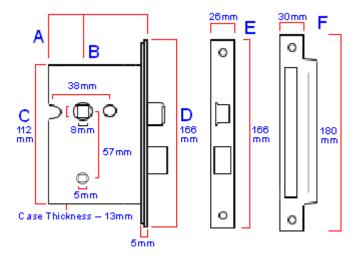

Item Code	Lock Case Depth (A)	Backset To Keyhole (B)
43931.1	64mm	44mm
43931.2	76mm	57mm

- Lever handle follower 8mm x 8mm.
- Dead bolt follower 5mm x 5mm.

Standards This Product Conforms To

- Lock case tested and passed to BS EN 12209. The British / European standard requirements and test methods covering locks and latches. Classification number **2H810F-BG20**.
- Tested and passed to BS EN 1634 the British / European standard for determining the fire resistance of door and shutter assemblies including hardware. Assessed for use on 30 minute and 1 hour timber fire doors FD30 / FD60.- Intumescent lock case liners required (sold separately).
- Certifire approved.
- CE Marked / UKCA Marked.
- Declaration of performance (DoP) please see the additional information tab to download the certificate.

Options Available To Order

- This lock is also available to order with radius (rounded shape) forend and strike plates. Please contact us for lead times and prices.
- Intumescent sheets and lock case liners are available. Please see our intumescent fire rated products category for details.

Rebate Kit For Double Rebated Doors

• Available to special order, please contact us for prices and lead times.

Unit Of Sale

• Each - (1 x lock case supplied with forend, strike plate and plastic back box).



 ${\bf 43931.1 - Architectural\ Quality\ Mortice\ Bathroom\ Lock - 64mm\ Case\ Depth\ (44mm\ Backset) - Matt\ White}$



 ${\bf 43931.2} \cdot {\bf Architectural\ Quality\ Mortice\ Bathroom\ Lock} \cdot {\bf 76mm\ Case\ Depth\ (57mm\ Backset)} \cdot {\bf Matt\ White}$