

Concealed Blum Style Soft Close Hinge - 18mm Thick Standard Overlay Doors

Product Images





Description


Shop Our Blum-Style Soft Close Hinges

- High-quality concealed blum soft close hinge and 3-way adjustable clip-on mounting plate.
- Our Blum soft-close hinges are suitable for doors that overlay the carcass only. (Overlay doors sit on top of the cupboard door frame.
- Featuring a high architectural quality 'clip-on' design with a built-in soft closing device. No more slamming cupboard doors, just a gentle push and the cabinet door will self close coming to a controlled soft stop.
- 3-way adjustability the door can be adjusted vertically (moving the door up and down), horizontally (moving the door side to side) and in and out (moving the door from or towards the carcass).
- This Blum soft-close hinge is suitable for heavy-duty areas and has been tested and passed to BS 6222-22009 test level H, which means it is suitable for use in high or heavy-use areas.
- The sprung hinge keeps the door held closed. There is no need for any kind of cupboard catch.
- Standard 35mm diameter cup with a 100-degree opening angle
- Our Blum soft close hinges come supplied adjustable clip-on mounting plate.

Suitable For Use On Overlay Style Doors Only

- Overlay Blum soft close hinges are suitable for doors that sit on top of the cabinet carcass.
- The diagram below shows how an overlay hinge is fitted. (Notice how the door sits in front of the cupboard frame.)


FULL OVERLAY DOOR

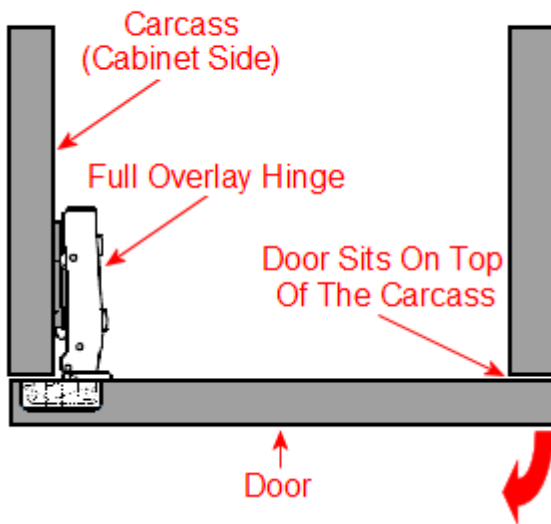


Clip On Design

- This hinge is supplied with an adjustable clip-on mounting plate. This plate allows the door to be fully adjusted and quickly removed by simply pushing a small button at the very tip of the hinge.
- The diagram below shows how the concealed Blum-style hinge clips on and off from the mounting plate.


Clip On Hinge Instructions

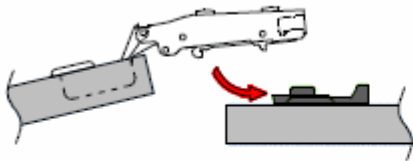


Clamp hinge on to the mounting plate as shown by direction arrow

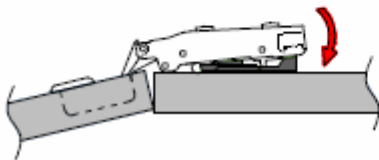

Press down the hinge arm to lock the plate as shown

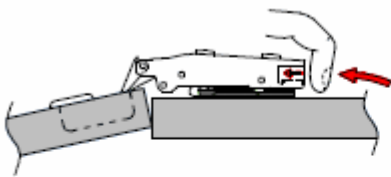

The door can be quickly removed by pushing the button

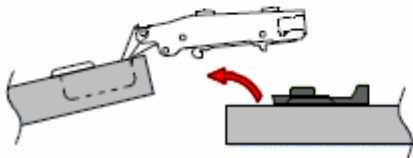

Unclipping the door from the mounting plate leaves all adjustments unaltered

Base Material


- Our concealed Blum soft close hinges are made from steel.

Finish Details

- Bright zinc plated.


3 Way Adjustable Hinge

- This overlay blum soft close hinge can be adjusted in 3 directions. - (see below diagram.)
- Lateral adjustment - turning the screw nearest to the cup allows the door to move side to side with a total movement of 5mm possible.
- Front-to-back adjustment - turning the screw at the tip of the hinge adjusts the door away from or toward the carcass with a total movement of 3.5mm possible.
- Vertical adjustment - turning the cam-operated screw on the mounting plate adjusts the height of the door up and down with a total movement of 4mm possible.

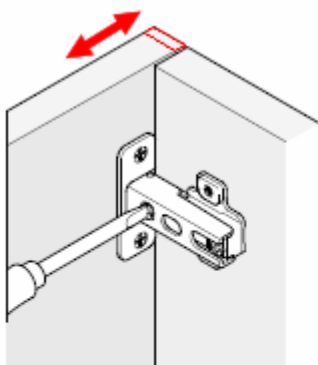


Lateral Adjustment
Moving Door
Left – Right

Total Movement Of
5mm Possible

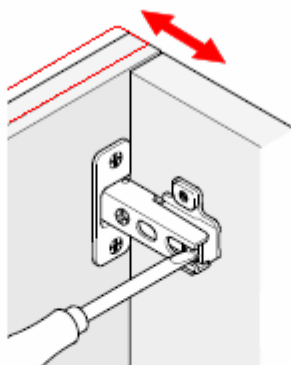

Front To Back Adjustment
Spacing Door Off Carcass

Total Movement Of
3.5mm Possible

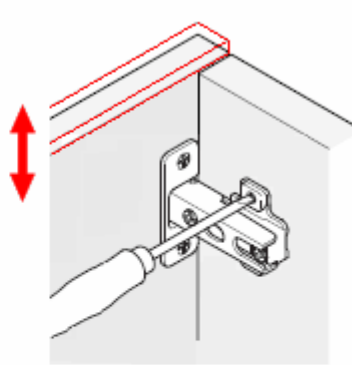

Vertical Adjustment
Moving Door
Up & Down

Total Movement Of
4mm Possible

Size Details

- Standard 35mm diameter cup. (Hole diameter required to be drilled into the door.)
- 100-degree opening angle.

Unit Of Sale

- The overlay concealed Blum style cabinet hinge is sold individually (each)
- Our Blum soft close hinges come supplied with an adjustable clip-on mounting plate and screws to suit an 18mm thick door and carcass.

Products in this set



15477.1 - Concealed Blum Style Hinge - With Built In Soft Close - To Suit 18mm Thick Standard Overlay Doors - Zinc Plated - (1 Hinge)