



Scrigno Adjustable Sliding Pocket Door Kit - Single Door Kit - 125mm Finished Wall Thickness - Supplied With White Melamine Jamb Kit

Product Images






Short Description

- Scrigno adjustable single pocket door kit.
- 4 kits available to cover the 10 most popular UK door sizes.
- Suits doors 35mm - 44mm thick.
- Max door weight 120kg.
- Supplied with white melamine jamb kit.

Description

- The Scrigno (pronounced Scree-nio) adjustable pocket door kit is stud work based kit which can be cut down on site to suit common UK door sizes.
- The Scrigno kit has 7 pieces and is easily assembled on site by cutting away the pre-marked track and vertical stud work.
- Allows an interior door to slide and disappear into a "pocket" within the wall cavity.
- Each set includes all the main components needed to install a long lasting, smooth running sliding door including a stud work pocket which is used to create the wall cavity or "pocket" for the door to slide into.
- This high quality sliding door gear is suitable for residential and light commercial applications. The unique design allows doors between 35mm-45mm thick to be installed with a finished wall thickness of 125mm.
- Supplied as a kit to create the pocket, which can be fully fitted in under 60 minutes by a skilled installer.
- Suitable for doors up to 120kg in weight.
- Suitable for use with timber doors only - **door not included**.
- The Scrigno kit is supplied **complete with a white melamine timber lining jamb kit**.

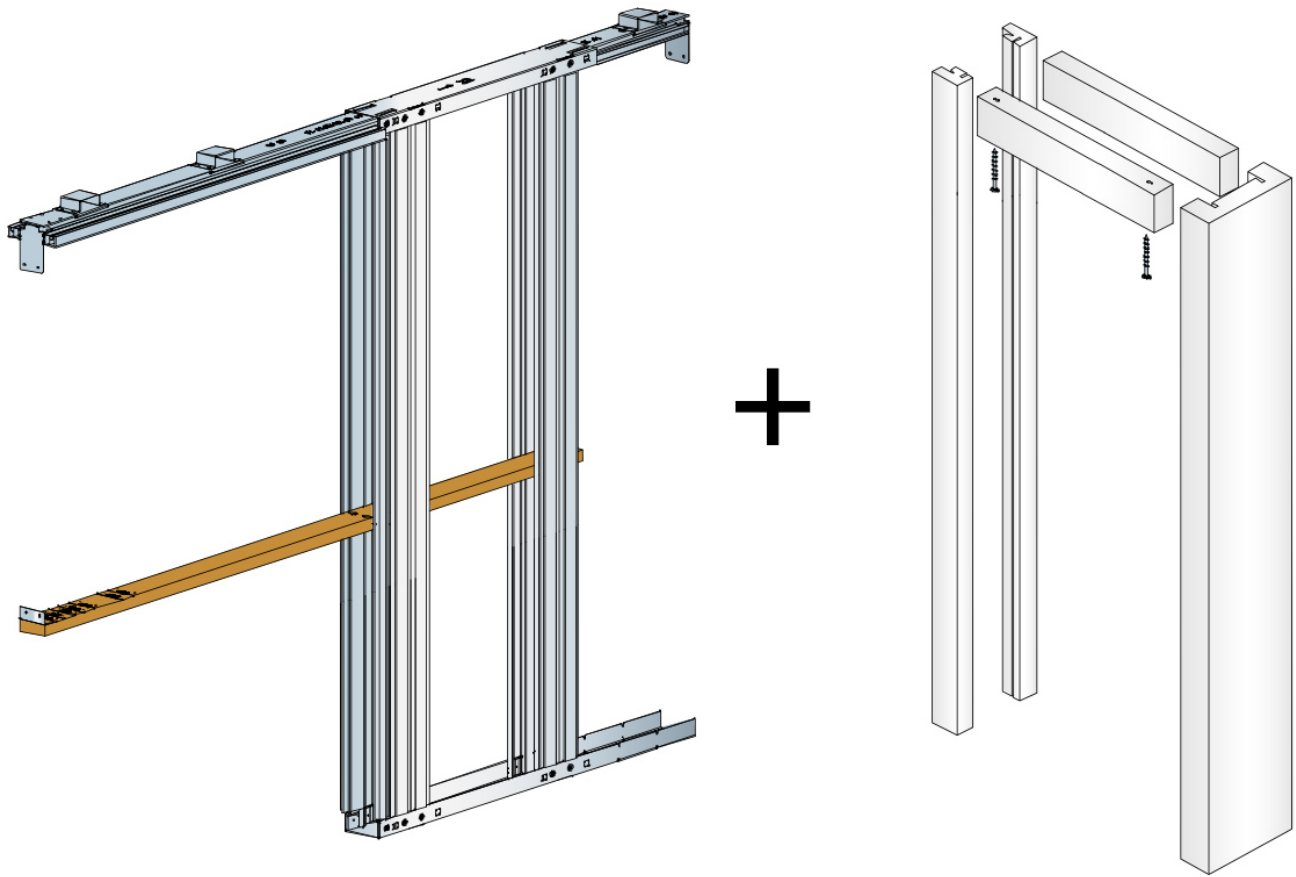

Accessories Available To Suit The Scrigno Adjustable Single Pocket Door Kit


- Soft close damper - to softly close the sliding door. - (sold separately product 48730).

Features & Benefits


- Space saving - sliding doors help create up to 8% more living more space within a property
- Quiet operation
- Easy installation
- Economical
- Can be cut on site to suit standard UK door sizes.
- Thanks to the “snap” positioning system, size change is simple and error-proof.
- Track and stud work is pre-marked to show the installer exactly where to cut for standard door sizes.




Dimensions - Frame Sizes & Door Kit Sizes Available

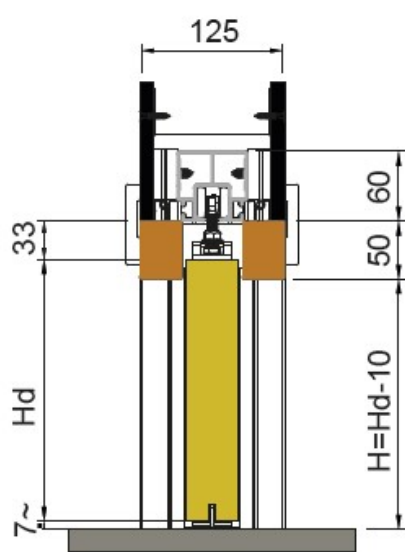

DOOR IN OPEN POSITION

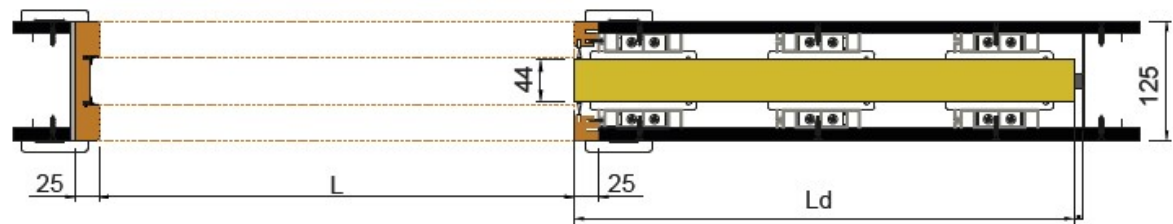

DOOR IN CLOSED POSITION

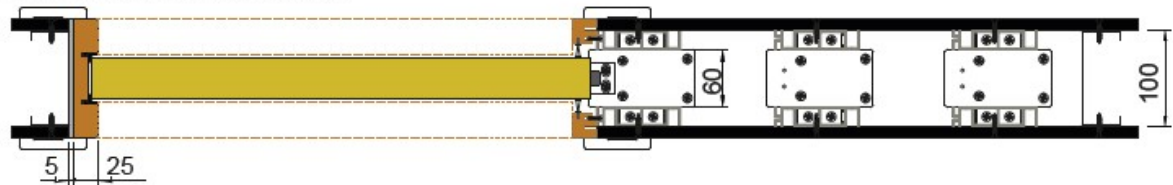

Item Code	To Suit Door Widths (Dw)	To Suit Door Height (Hd)	Finished Wall Thickness
48729.1	610mm / 686mm / 786mm	1981mm	125mm
48729.2	838mm / 914mm	1981mm	125mm
48729.3	626mm / 726mm / 826mm	2040mm	125mm
48729.4	926mm / 1026mm	2040mm	125mm

48729.1 - Constructed Frame Dimensions

Door Widths (Ld)	Door Height (Hd)	Clear Passage Size (H x L)	Structural Opening (Overall Frame Size)	Cutting Mark
610mm	1981mm	580mm x 1970mm	1230mm x 2075mm	1S
686mm	1981mm	656mm x 1970mm	1382mm x 2075mm	2S
762mm	1981mm	732mm x 1970mm	1534mm x 2075mm	3S*

* Standard size in purchased kit no cutting required

48729.2 - Constructed Frame Dimensions

Door Widths (Ld)	Door Height (Hd)	Clear Passage Size (H x L)	Structural Opening (Overall Frame Size)	Cutting Mark
838mm	1981mm	808mm x 1970mm	1686mm x 2075mm	4S
914mm	1981mm	884mm x 1970mm	1838mm x 2075mm	5S

* Standard size in purchased kit no cutting required

48729.3 - Constructed Frame Dimensions

Door Widths (Ld)	Door Height (Hd)	Clear Passage Size (H x L)	Structural Opening (Overall Frame Size)	Cutting Mark
626mm	2040mm	600mm x 2030mm	1270mm x 2135mm	6S
726mm	2040mm	700mm x 2030mm	1470mm x 2135mm	7S
826mm	2040mm	800mm x 2030mm	1670mm x 2135mm	8S

* Standard size in purchased kit no cutting required


48729.4 - Constructed Frame Dimensions

Door Widths (Ld)	Door Height (Hd)	Clear Passage Size (H x L)	Structural Opening (Overall Frame Size)	Cutting Mark
926mm	2040mm	900mm x 2030mm	1870mm x 2135mm	9S
1026mm	2040mm	1000mm x 2030mm	2070mm x 2135mm	10S


* Standard size in purchased kit no cutting required

Cutting Details


1. Cut track "F" to the desired size on the rear side • Cut PVC profile bars "M" on the front side

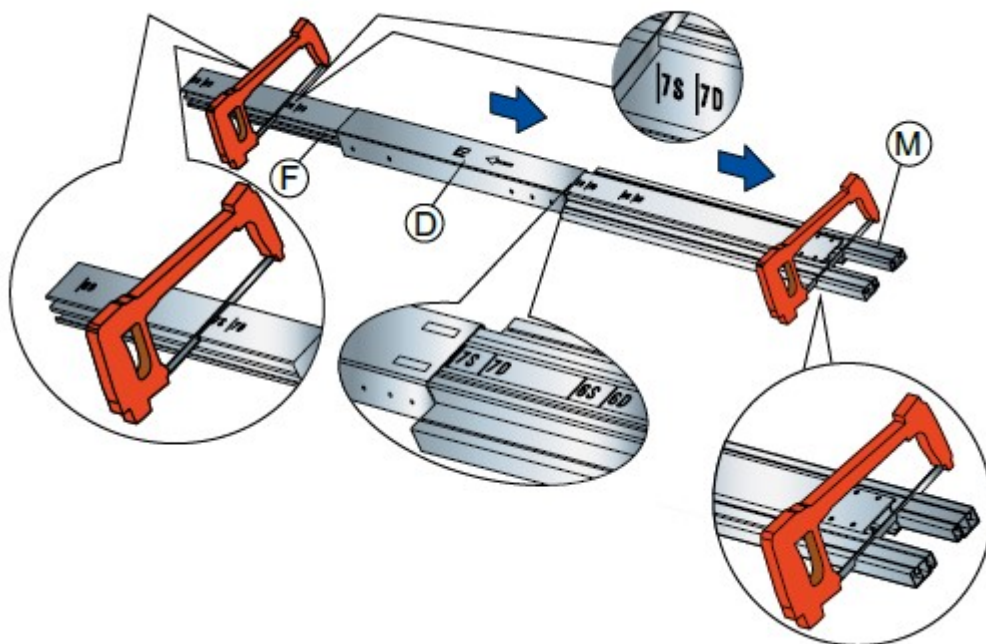

2. Cut the wooden spacer "E" to the desired size (see above charts)

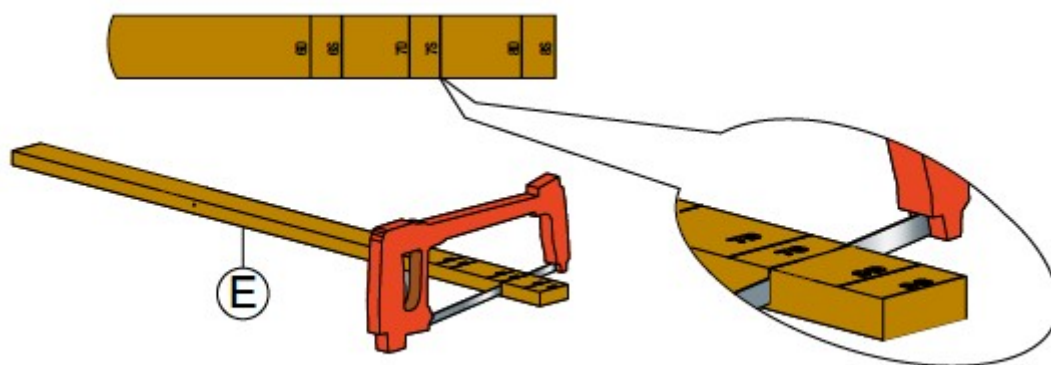

3. If necessary, cut the floor base profile bar "C" to be positioned on floor (see chart)

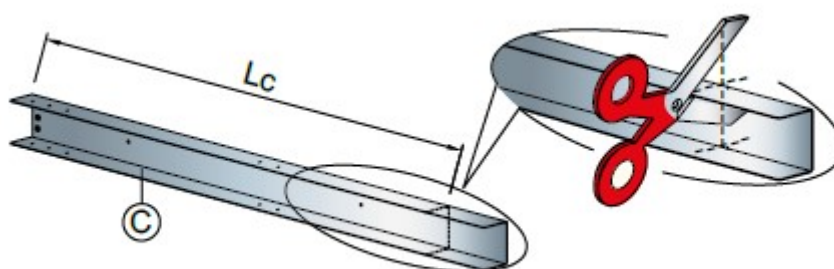

- Please note plasterboard is not provided with this kit and must be purchased separately.

Items Included Within The Scrigno Pocket Sliding Door Kit

- Metal stud work to create the "pocket"
- Screws to fix plasterboard to metal frame - **(Plasterboard not supplied)**
- Roller bearing door hanger kit
- White melamine timber lining kit - (door jamb kit) including brush seals and rubber bumpers.

Installation Videos

Products in this set



48729.1 - Scrigno Adjustable Sliding Pocket Kit - Single Door - 125mm Finished Wall Thickness - To Suit Door Widths - 610mm / 686mm / 786mm x 1981mm Height - Supplied With White Melamine Jamb Kit



48729.2 - Scrigno Adjustable Sliding Pocket Kit - Single Door - 125mm Finished Wall Thickness - To Suit Door Widths - 838mm / 914mm x 1981mm Height - Supplied With White Melamine Jamb Kit



48729.3 - Scrigno Adjustable Sliding Pocket Kit - Single Door - 125mm Finished Wall Thickness - To Suit Door Widths - 626mm / 726mm / 826mm x 2040mm Height - Supplied With White Melamine Jamb Kit



48729.4 - Scrigno Adjustable Sliding Pocket Kit - Single Door - 125mm Finished Wall Thickness - To Suit Door Widths - 926mm / 1026mm x 2040mm Height - Supplied With White Melamine Jamb Kit